
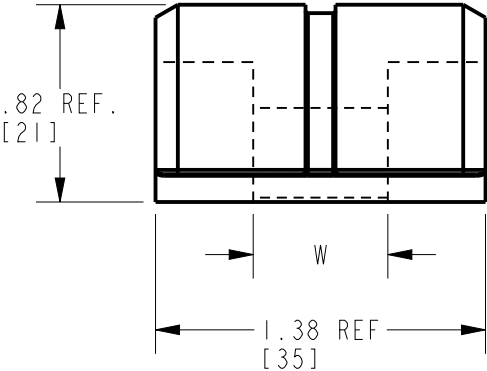
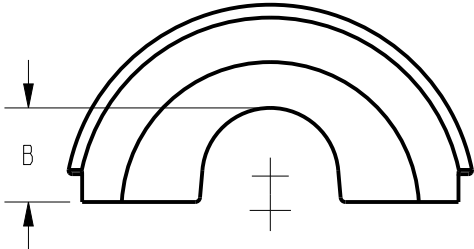
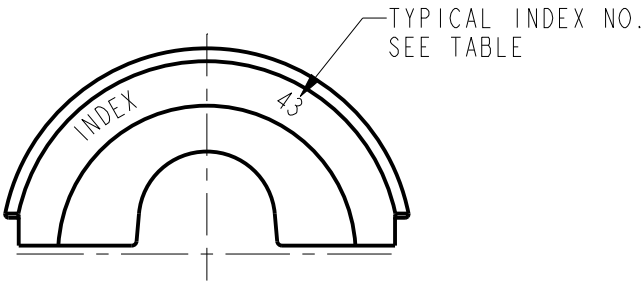


CAT. NO	INDEX NO.	INDENTOR	CABLE SIZE	B	W
UV8L	38	Y34PL	#8	.24 [6]	.39 [10]
UV6L	39	Y34PLA	#6	.27 [7]	.44 [11]
UV4L	40	Y34PLA	#4	.31 [8]	.44 [11]
UV2L	41	Y34PLA	#2	.35 [9]	.50 [13]
UV1L	42	Y34PLA	#1	.37 [9]	.50 [13]
UV25L	43	Y34PA	1/0	.39 [10]	.56 [14]
UV26L	44	Y34PA	2/0	.44 [11]	.69 [18]
UV27L	45	Y34PA	3/0	.47 [12]	.69 [18]
UV28L	46	Y34PA	4/0	.50 [13]	.75 [19]

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	10/08/2013 00:00:00 AM	DRAWING RELEASED	33576	YM	MB

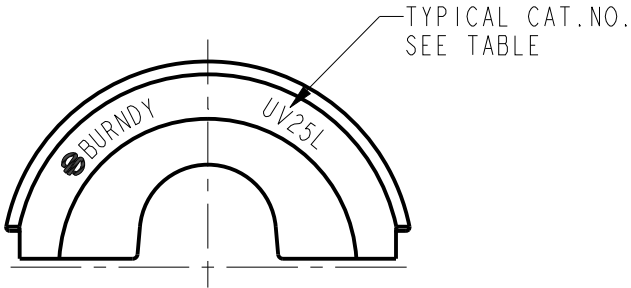

NOTES:

1. USE WITH INDENTOR ADAPTOR Y39P3 OR Y35P3.
2. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.

REFERENCE: SA070839-01

TO ORDER BURNDY® PRODUCTS CALL		Y35 & Y39 NEST DIES	
UNITED STATES:		ITEM NO: SEE TABLE	
1-800-346-4175 (LONDONDERRY, NH)		CAT. NO: UL--L (TABLE)	
CANADA:		DRAWN BY: JEL 10/13/89	
1-800-361-6975 (QUEBEC)		CHECKER: KLH 10/18/89	
1-800-387-6487 (ALL OTHER PROVINCES)		DSN APPVL: RAM 10/20/89	
FOR PRODUCT INFO: http://www.burndy.com		MFG APPVL: 10/20/89	
		QA APPVL: FRR 10/20/89	
		MKT APPVL: MIKE 10/11/13	
		SCALE: 1:1	
		DRAWING NO	
		REV	
		PROJECT #: DO 51563	
		SIZE	
		DOCUMENT TYPE: Sales	
		REL LEVEL: Released	
		SC204449-01	
		SHEET 1 OF 1	
		A	